

Constant Current Control Gear, 1 Channel, DALI Dimmable - IP20 LED Drivers



ECG Versions

*Photograph is for viewing purpose. Technical data not to be drawn from this picture

Order No.	Model	Wattage (W)	Output Voltage Range (DC)	Output Current Range (mA)
10327662	CCD1050-10SR01/TUDT6/2319S	10	3-42	100-500
10327666	CCD1070-15SR02/TUDT6/2319S	15	6-42	100-700
10327661	CCD1070-25SR03/TUDT6/2319S	25	6-54	250-700
10327664	CCD1105-36SR04/TUDT6/2319S	36	6-54	350-1050
10327660	CCD1140-45SR04/TUDT6/2319S	45	6-54	500-1400

Performance Characteristics

- * DALI-2, DT6-Dimmable 1-channel ECG for constant current Operation of LED Modules
- * High Efficiency 80 - 88% (100% Load)
- * Input Voltage Range - 180-264VAC
- * Mains Overvoltage Protection upto 440VAC for 2 Hrs.
- * Surge Protection Up to 2KV
- * ECG extensively protected against abnormal Operating conditions at the output e.g. Short-circuit, Open circuit.
- * Nominal service life - 30,000 Hrs. at $t_c = t_c \text{ max}$
- * Current selectable via NFC Program tool
- * Suitable for Indoor LED Lighting applications

Applications

- Office
- Shops

Markings



Constant Current Control Gear, 1 Channel, DALI Dimmable - IP20 LED Drivers

General technical

Rated Input Voltage	220-240VAC
Rated Frequency	50/60Hz
Max Admissible input Voltage Range(VAC)	180-264VAC
Total Harmonic Distortion(THD)	<10% at full load
Output Current Tolerance	+/-3%
Max. Ripple Output Current(With LED Load)	<10%
Galvanic Separation to mains input	Basic Insulation(1.5KV)
Starting time	<1 Sec
Power factor	>0.94 @230Vac Full Load
Efficiency(Full Load)	80-88% @230Vac Full Load
Open Circuit Protection	Yes
Output short circuit protection	Yes
Connector Type	Push Terminal
Wire Cross section	0.5 sq.mm - 1.5 sq.mm
Wire Stripping length	8.5-9.5mm
Max wire length to LED Modules	<2 Meter
Max Surface Temp acc. EN61347-2-13/C5C	115°C
Ambient Temp	-25°C to 45°C
Case Temp	85°C
Degree of Protection	IP20
Surge Level	2KV
Dimming Interface	DT6
Dimming Range	0.01% - 100% @Max Current
Dimming Method	Amplitude/CCR dimming
Dimming Curve	Linear/Log

Operating Data

Order No	Input Current (A)	Input Power (W)	Power Factor	Athd (%)	Efficiency (%)	Output Currents (mA)	Output Voltage (VDC)	Output Power (W)	Dimension (mm)
10327662	0.1A	12	0.94	10%	80%	100-500	3-42	10	101x36x25
10327666	0.1A	18	0.97	10%	80%	100-700	6-42	15	135x35x20
10327661	0.2A	28	0.97	10%	85%	250-700	6-54	25	120x41x28
10327664	0.2A	40	0.97	10%	85%	350-1050	6-54	36	145x45x28
10327660	0.2A	50	0.96	10%	88%	500-1400	6-54	45	145x45x28


All specifications at 230 Vac nominal operations & 100% load

Safety & Warnings

- *Read All instructions carefully before installation
- *Check driver's output current rating with LED's current rating before installation
- *Do not install when power applied to the device
- *Do not expose driver to wet surface/moisture

Constant Current Control Gear, 1 Channel, DALI Dimmable - IP20 LED Drivers

Wiring Diagram

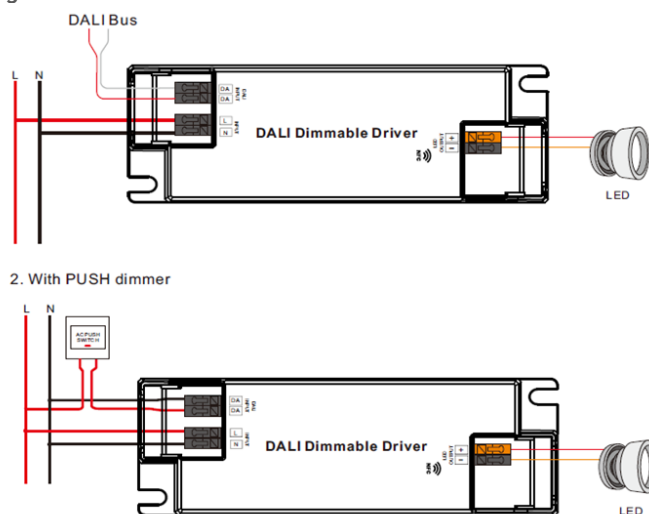

Push-button operation / supplementary functions

Push-button operation


In addition to control via DALI control signals, the DALI interface can also be used for switching and dimming via a push-button.

Short button press	Status: LEDs switched off Status: LEDs switched off , ECG in standby mode	Status: LEDs switched on
Short button press	Switching on of LEDs to the last dimming level (memory function)	Switching off of LEDs and saving of current dimming level; ECG in standby mode
Long button press	Switching on of LEDs to the last dimming level and then dimming up or dimming down	Dimming up or dimming down of LEDs; each release and

Circuit breaker / Inrush current

Order No.	Typ. I peak / delta t	LS Type	10A	13A	16A	20A	25A
10327662	4.32A/80us	B	32	44	52	66	80
10327662		C	55	72	88	110	140
10327666	3.96A/90us	B	34	45	56	70	90
10327666		C	60	80	94	120	150
10327661	5.64A/72us	B	24	32	40	50	60
10327661		C	32	50	50	66	80
10327664	8.56A/88us	B	16	20	26	32	40
10327664		C	26	34	42	52	66
10327660	8.56A/88us	B	16	20	26	32	40
10327660		C	26	34	42	52	66


Typical current - time profile when switching on

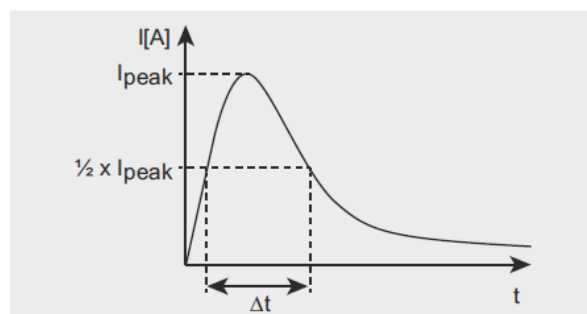


-Data for U supply = 230 VAC, mains impedance = 1 Ω
 - In case of multi-polar CB the maximum number is reduced by 20 %
 - The max. number may differ depending on CB manufacturer.
 Please consider the specifications of the manufacturer.
 -Basically, CB with C-characteristics are recommended to be used in lighting groups.

Constant Current Control Gear, 1 Channel, DALI Dimmable - IP20 LED Drivers


Operating Window of drivers

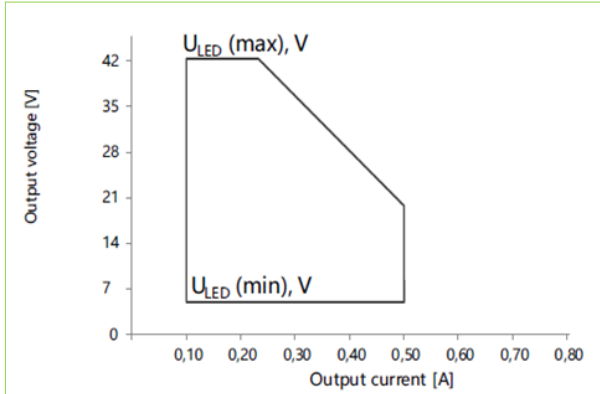


Model No.10327662-10W

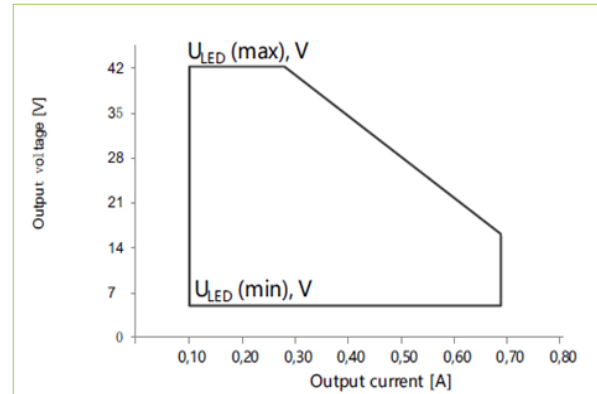


Model No.10327666-15W

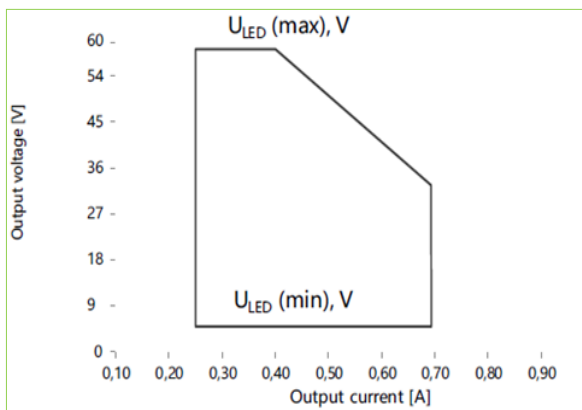

Model No.10327661-25W

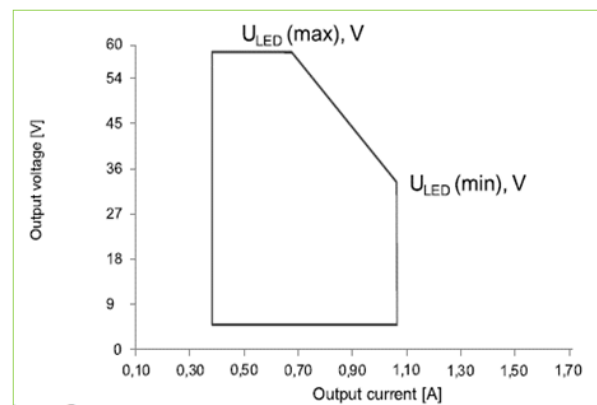

Model No.10327664-36W

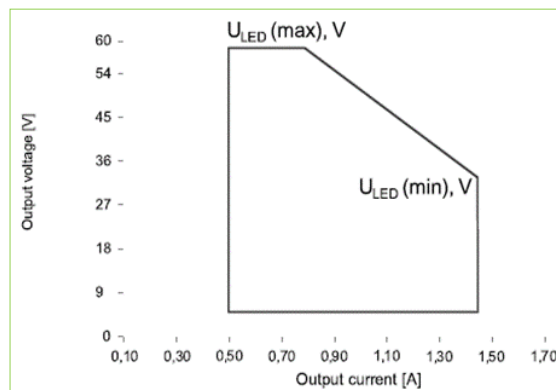

Model No.10327660-45W

Logistic Data

Order No	Weight/pc (Kg)	Driver Dimension (mm)	Standard Box (pcs)	Weight/ Box (Kg)	Box Dimension (mm)
10327662		101x36x25			
10327666		135x35x20			
10327661		120x41x28			
10327664		145x45x28			
10327660		145x45x28			

BAG Electronics & Technology India Pvt. Ltd.

Registered Office & Works - Survey No.19,Kondhwa Road, Yewalewadi, Pune- 411048, Maharashtra, India

Email - Sales@bagelectronics.in